


## Linteaux creux



### Linteau creux en béton armé 14x14

**Poids:** 33 kg/m

**Emballage:** 16 pc/palette

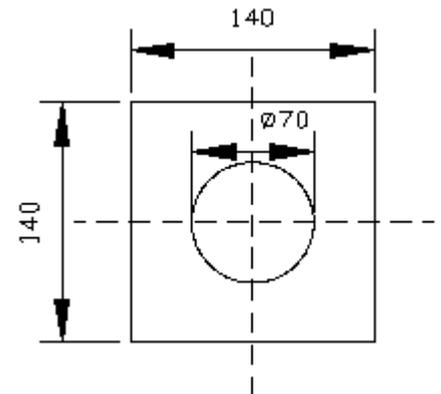

Longeur L	Ouverture I	Armature en-dessous BE500	Armature en-dessus BE500	Déviation avec charge calculée	Charge calculée maçonnerie	Charge admissible avec déviation de 1/1000 I
[m]	[m]	[mm]	[mm]	[mm]	[N]	[N]
1.20	1.00	2 x 6	2 x 6	0.06	563	9900
1.40	1.20	2 x 6	2 x 6	0.14	810	6840
1.60	1.40	2 x 6	2 x 6	0.30	1103	5086
1.80	1.60	2 x 6	2 x 6	0.38	1440	6076
2.00	1.80	2 x 8	2 x 8	0.68	1823	4800
2.20	2.00	2 x 8	2 x 8	1.15	2250	3888
2.40	2.20	2 x 8	2 x 8	1.86	2723	3214
2.60	2.40	2 x 8	2 x 8	2.88	3240	2700*
2.80	2.60	2 x 8	2 x 8	4.3	3803	2301*
3.00	2.80	2 x 8	2 x 8	6.22	4410	1417*

\* Charge admissible avec déviation plus de 1/1000 I