


Linteaux creux



Linteau creux en béton armé 14x19

Poids: 55 kg/m

Emballage: 10 pc/palette

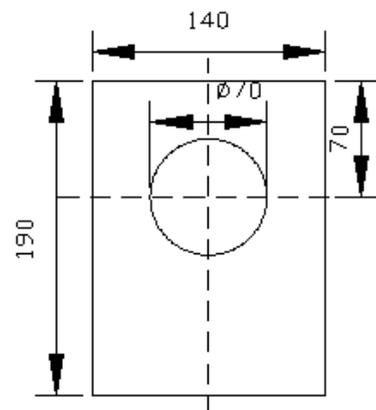

Longeur L	Ouverture I	Armature en -dessous BE500	Armature en -dessus BE500	Déviati on avec charge calculée	Charge calculée maçonnerie	Charge admissible avec Déviati on de 1/1000 I
[m]	[m]	[mm]	[mm]	[mm]	[N]	[N]
1.20	1.00	2 x 6	2 x 6	0.03	563	19400
1.40	1.20	2 x 6	2 x 6	0.07	810	13476
1.60	1.40	3 x 6	2 x 6	0.15	1103	13711
1.80	1.60	2 x 8	2 x 8	0.17	1440	13430
2.00	1.80	2 x 8	2 x 8	0.35	1823	9502
2.20	2.00	2 x 8	2 x 8	0.58	2250	7696
2.40	2.20	2 x 8	2 x 8	0.94	2723	6360
2.60	2.40	2 x 8	2 x 8	1.45	3240	5344
2.80	2.60	2 x 8	2 x 8	2.16	3803	4552
3.00	2.80	2 x 10	2 x 8	2.25	4410	5482
3.20	3.00	2 x 10	2 x 10	3.16	5061	4776
3.40	3.20	3 x 10	2 x 10	3.30	5760	5590
3.60	3.40	3 x 10	2 x 10	4.46	6502	4953